

MDS-6EXTF

Mid-Rise Scissor Lifts

SKU# 5175151
6,000-lb. Capacity, Open Center / Flush-Mount

THE MID-RISE, FLUSH-MOUNT SCISSOR LIFT

The MDS-6EXTF mid-rise lift has been meticulously designed to meet the unique needs of long-wheelbase vehicles. With extended lifting points, it effortlessly reaches the far edges of your vehicle's underbody. The addition of extended approach ramps transforms your flush-mount mid-rise lift into an approach lift, making it easy to accommodate low-stance vehicles and larger tires.

The pneumatic kicker boosts the lift platforms for the initial 6 inches, overcoming the mechanical challenges normally faced with scissor lifts. These air-powered boosters assist the hydraulics during the initial lifting phase and are maintenance-free. Four hydraulic cylinders work in unison, ensuring a uniform lift. A built-in flow divider ensures equal pressure to each hydraulic hose, achieving about 45 inches of lift quickly and efficiently.

YOUR SAFETY, OUR PRIORITY

The MDS-6EXTF is equipped with safety arms that lock automatically and continuously during ascent, transferring all pressure off the hydraulic system when secured, ensuring no failures due to fluid leaks. Air lock releases replace traditional spring releases, instantly disengaging the lock upon descent with the push of a button. These air locks require minimal maintenance and are just as safe as spring devices, needing a 50 PSI, 10 CFM air source during installation.

The ease of use, combined with robust features makes the MDS-6EXTF an indispensable addition to any workshop, especially those dealing with the latest generation of electric vehicles.



**STANDARD RUBBER PADS
INCLUDED**

VERSATILITY AT ITS BEST

The MDS-6EXTF comes with rugged rubber lift blocks, designed to withstand heavy use and abuse while ensuring secure lifting points. With multiple lock positions, you can choose the height appropriate for any job, whether it's a few inches for brake service or full extension for comfortable under-vehicle access.

FEATURES

- 6,000 lb. Capacity
- Three Locking Positions
- Solid-Steel Safety Lock Bars
- High Point Features Zerk Grease Fitting
- Solid-Steel Scissor Frame Support Bars
- Push-Button Safety Lock Release System
- Dual Master Hydraulic Cylinders with Dual Equilizing Cylinders

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2017 or ANSI/UL 201. Consult www.autolift.org for a complete list or contact BendPak via contact@bendpak.com.

1-800-253-2363 • sales@bendpak.com
30440 Agoura Road Agoura Hills, CA 91301 USA



BendPak

MDS-6EXTF

Mid-Rise Scissor Lifts



SKU# 5175151
6,000-lb. Capacity, Open Center / Flush-Mount

SPECIFICATIONS

Type	Flush-Mount
Lifting Capacity	6,000 lbs. / 2,722 kg
A Lifting Height (full rise - no blocks)	36.75 in. / 933 mm
Lifting Height (full rise) Med. lift blocks 1.5 in. (38 mm)	38.25 in. / 972 mm
Lifting Height (full rise) Tall lift blocks 2.9 in. (75 mm)	39.65 in. / 1,007 mm
B Platform Length	78.75 in. / 2,000 mm
C Lowered Height	5.25 in. / 133 mm (Top of platform to be flush with floor)
D Platform Width	19 in. / 484 mm
E Width Between Platforms	40 to 46 in. / 1,018 to 1,168 mm
F Max. Platform to Console	40 in. / 1,024 mm
Lifting Time	35 seconds
Hydraulic Pressure Developed at Max Capacity	1700 psi / 11.72 N/m ²
Motor	110 VAC at 50-60 Hz., 1 Ph. 200 VAC at 50 Hz., 1 Ph. 208-230 VAC at 60 Hz., 1 Ph.

Specifications subject to change without notice.

FLUSH-MOUNT MID-RISE LIFT

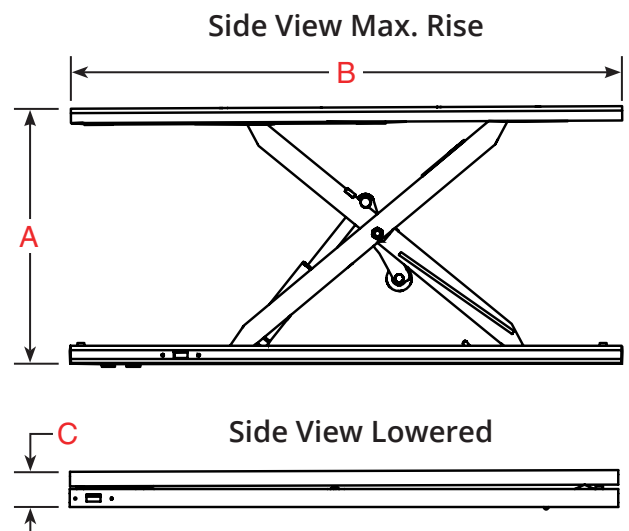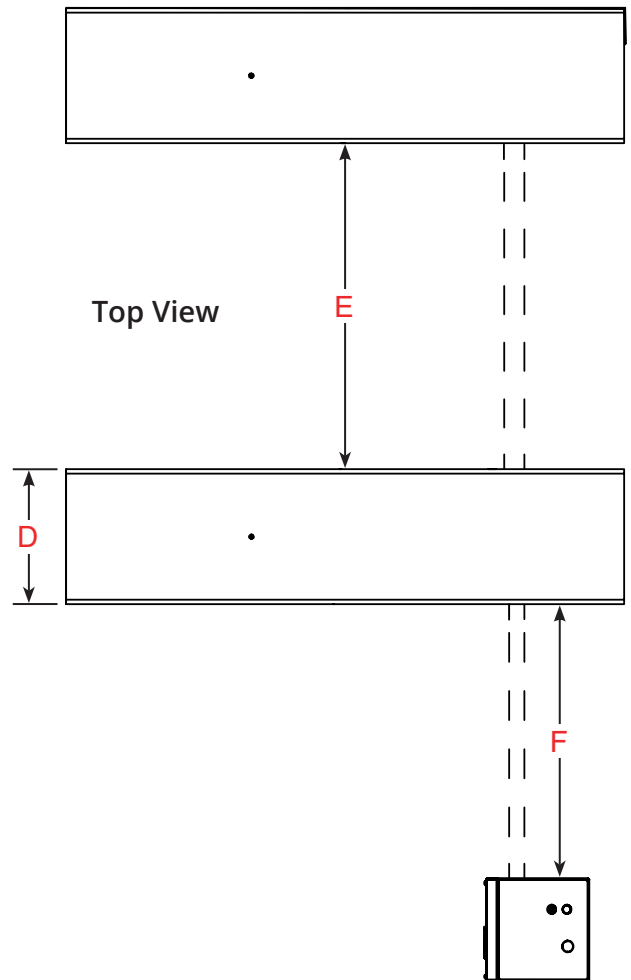

1-800-253-2363 • sales@bendpak.com
30440 Agoura Road Agoura Hills, CA 91301 USA



BendPak